

call barge in to specific DDI's using chanspy

204 Keira Tait Fri, Apr 27, 2018 [Sangoma PBXact](#) 2067


In order to setup call barge in, you will need to follow the below steps

First, enable chanspy in modules > feature codes, and then select the extension you want.



Then go to modules > config edit, you are looking for extensions_custom.conf

+ Add New File

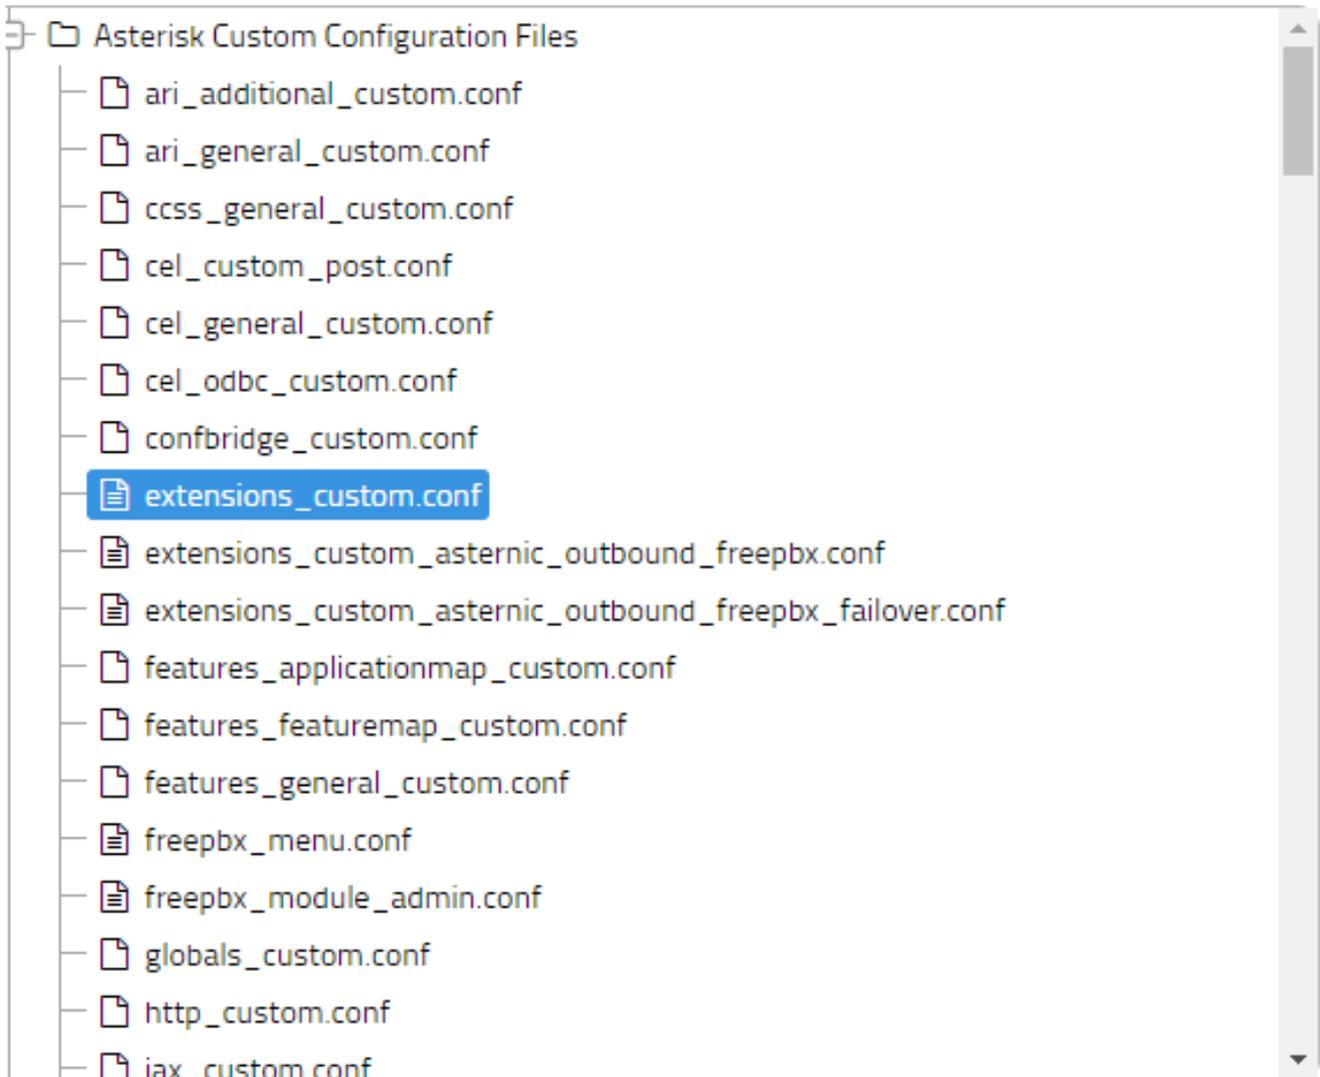

If you go into this file, you want to paste the below code and remove or add what you want in order to block barge in on particular ddi's.

```
[ext-local-custom]
; Block Access
exten => _*2227760,1,Macro(user-callerid,)
```

```
exten => _*2227760,n,Hangup
exten => _*2237760,1,Macro(user-callerid,)
exten => _*2237760,n,Hangup
exten => _*2247760,1,Macro(user-callerid,)
exten => _*2247760,n,Hangup
exten => _*2227761,1,Macro(user-callerid,)
exten => _*2227761,n,Hangup
exten => _*2237761,1,Macro(user-callerid,)
exten => _*2237761,n,Hangup
exten => _*2247761,1,Macro(user-callerid,)
exten => _*2247761,n,Hangup
exten => _*2227721,1,Macro(user-callerid,)
exten => _*2227721,n,Hangup
exten => _*2237721,1,Macro(user-callerid,)
exten => _*2237721,n,Hangup
exten => _*2247721,1,Macro(user-callerid,)
exten => _*2247721,n,Hangup
; Listen
exten => _*222x.#,1,Macro(user-callerid,)
exten => _*222x.#,n,Answer
exten => _*222x.#,n,NoCDR
exten => _*222x.#,n,Wait(1)
exten => _*222x.#,n,ChanSpy(sip/${EXTEN:4},q)
exten => _*222x.#,n,Hangup
```

; Whisper

```
exten => _*223x.#,1,Macro(user-callerid,)
exten => _*223x.#,n,Answer
exten => _*223x.#,n,NoCDR
exten => _*223x.#,n,Wait(1)
exten => _*223x.#,n,ChanSpy(sip/${EXTEN:4},qw)
exten => _*223x.#,n,Hangup
```

; Barge In

```
exten => _*224x.#,1,Macro(user-callerid,)
exten => _*224x.#,n,Answer
exten => _*224x.#,n,NoCDR
exten => _*224x.#,n,Wait(1)
exten => _*224x.#,n,ChanSpy(SIP/${EXTEN:4},qB)
```

exten => _*224x.#,n,Hangup

Note you want to change the *222, *222, *223 and *224 to the code you wish to dial when doing the barge in.

Online URL: <https://kb2.ic.uk/article.php?id=204>