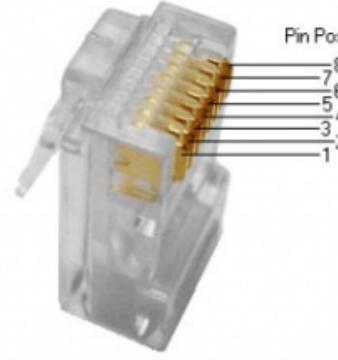


# Cables and Wiring

20 Jonathan Mon, Aug 24, 2020 [Broadband / IC-Air](#), [Ethernet / MPLS](#), [Hosting & Datacentres](#)  
14292

## Cables, Cabling, RJ45, RJ21, MSAN

### EIA/TIA-568A and 568B pinouts

Pin	T568A Pair	T568B Pair	1000BASE-T Signal ID	Wire	T568A Color	T568B Color	Pins on plug face (socket is reversed)
1	3	2	DA+	tip	white/green stripe	white/orange stripe	 <p>Pin Position</p>
2	3	2	DA-	ring	green solid	orange solid	
3	2	3	DB+	tip	white/orange stripe	white/green stripe	
4	1	1	DC+	ring	blue solid	blue solid	
5	1	1	DC-	tip	white/blue stripe	white/blue stripe	
6	2	3	DB-	ring	orange solid	green solid	
7	4	4	DD+	tip	white/brown stripe	white/brown stripe	
8	4	4	DD-	ring	brown solid	brown solid	

Standard for working on connectors for Ethernet connections. But note that only the "A" standard is


Power over Ethernet, IEEE 802.3af standards A and B

PINS on Switch	T568A Color	T568B Color	10/100 DC on Spares (mode B)	10/100 Mixed DC & Data (mode A)	1000 (1 Gigabit) DC & Bi-Data (mode B)	1000 (1 Gigabit) DC & Bi-Data (mode A)
Pin 1	white/green stripe	white/orange stripe	Rx +	Rx + DC +	TxRx A +	TxRx A + DC +
Pin 2	green solid	orange solid	Rx -	Rx - DC +	TxRx A -	TxRx A - DC +
Pin 3	white/orange stripe	white/green stripe	Tx +	Tx + DC -	TxRx B +	TxRx B + DC -
Pin 4	blue solid	blue solid	DC +	unused	TxRx C + DC +	TxRx C +
Pin 5	white/blue stripe	white/blue stripe	DC +	unused	TxRx C - DC +	TxRx C -
Pin 6	orange solid	green solid	Tx -	Tx - DC -	TxRx B -	TxRx B - DC -
Pin 7	white/brown stripe	white/brown stripe	DC -	unused	TxRx D + DC -	TxRx D +
Pin 8	brown solid	brown solid	DC -	unused	TxRx D - DC -	TxRx D -

Power over Ethernet pinouts. More and more common these days in VoIP phone systems, but can also

**Two pairs crossed, two pairs uncrossed  
10BASE-T or 100BASE-TX crossover**

Pin	Connection 1: T568A			Connection 2: T568B			Pins on plug face
	signal	pair	color	signal	pair	color	
1	BI_DA+	3	white/green stripe	BI_DB+	2	white/orange stripe	
2	BI_DA-	3	green solid	BI_DB-	2	orange solid	
3	BI_DB+	2	white/orange stripe	BI_DA+	3	white/green stripe	
4		1	blue solid		1	blue solid	
5		1	white/blue stripe		1	white/blue stripe	
6	BI_DB-	2	orange solid	BI_DA-	3	green solid	
7		4	white/brown stripe		4	white/brown stripe	
8		4	brown solid		4	brown solid	






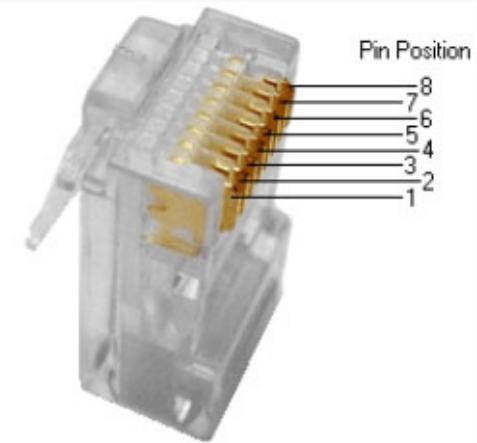



Ethernet crossover cables are useful for connecting to similar pieces of equipment together, such as 100baseT crossover (a 100Mbps full-duplex cable). Gigabit Ethernet uses a different crossover, but a

### Gigabit T568A crossover

All four pairs crossed


10BASE-T, 100BASE-TX, 100BASE-T4 or 1000BASE-T crossover (shown as T568A)

Pin	Connection 1: T568A			Connection 2: T568A Crossed			Pins on plug face
	signal	pair	color	signal	pair	color	
1	BI_DA+	3		BI_DB+	2		
2	BI_DA-	3		BI_DB-	2		
3	BI_DB+	2		BI_DA+	3		
4	BI_DC+	1		BI_DD+	4		
5	BI_DC-	1		BI_DD-	4		
6	BI_DB-	2		BI_DA-	3		
7	BI_DD+	4		BI_DC+	1		
8	BI_DD-	4		BI_DC-	1		

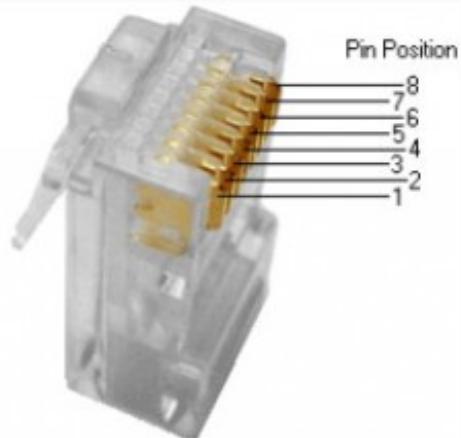

This type cable is backwards compatible with 10/100 base T systems.

Registered Jack (RJ) 11, 14, 25

Position	Pair	T/R	±	RJ11	RJ14	RJ25	25-pair color code	U.S. Bell System colors	German colors	Australian colors
1	3	T	+			T3		white	violet	orange
2	2	T	+		T2	T2		black	green	red
3	1	R	-	R1	R1	R1		red	white	blue
4	1	T	+	T1	T1	T1		green	brown	white
5	2	R	-		R2	R2		yellow	yellow	black
6	3	R	-			R3		blue	slate	green

Telephone system equipment jacks.


## RJ48C and RJ48X wiring

Pin	Pair	Signal	Color
1	R	RX Ring	Orange/White
2	T	RX Tip	White/Orange
3		reserved	White/Green
4	R1	TX Ring	Blue/White
5	T1	TX Tip	White/Blue
6		reserved	Green/White
7		shield	White/Brown
8		shield	Brown/White

RJ48 and RJ48X wiring is T1 IDS, which is the same as RJ45. Since BRI and PRI is D4, the two wires

Two pairs crossed, two pairs uncrossed  
T1 crossover

Pin	Connection 1: T568A		Connection 2: T568B		Pins on plug face
	pair	color	pair	color	
1	2	white/orange stripe	1	blue solid	
2	2	orange solid	1	white/blue stripe	
3	3	white/green stripe	3	white/green stripe	
4	1	blue solid	2	white/orange stripe	
5	1	white/blue stripe	2	orange solid	
6	3	green solid	3	green solid	
7	4	white/brown stripe	4	white/brown stripe	
8	4	brown solid	4	brown solid	

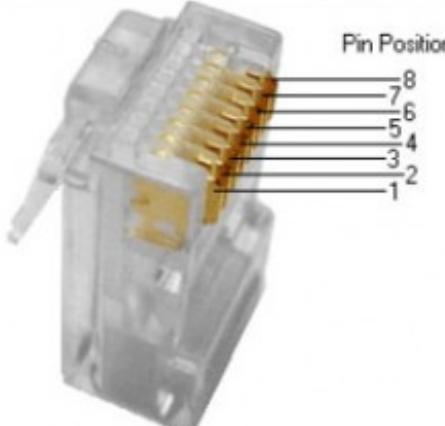


Crossover cable for T1 (DS0 or DS1 interface). Note this is different from most Ethernet crossover and pin 2 to pin 5 on a T568B connector!



Above (and left) colour-code order is applied to a RJ21 socket as shown below (and on the right)

The RJ21 mage is rotated for clarity of numbering.

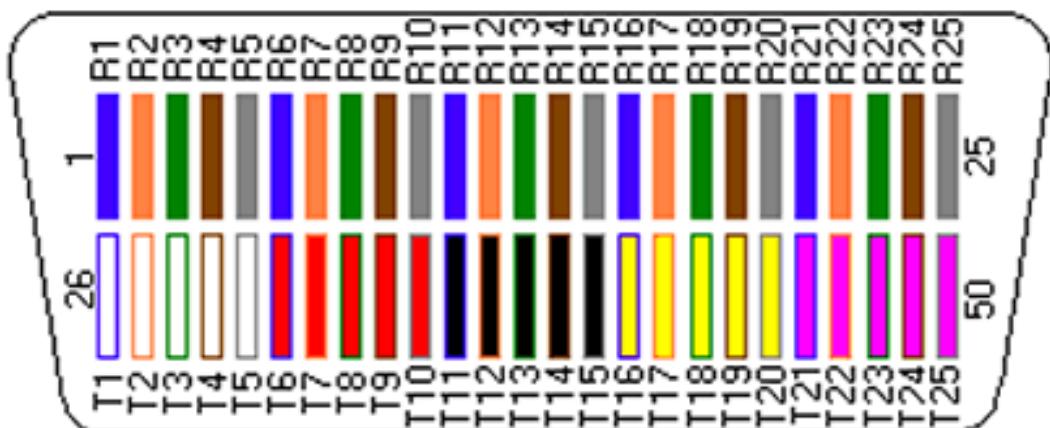

## RJ21 RJ21X

Color	Pin (Tip)	Pin (Ring)	Color
White/Blue	26	1	Blue/White
White/Orange	27	2	Orange/White
White/Green	28	3	Green/White
White/Brown	29	4	Brown/White
White/Slate	30	5	Slate/White
Red/Blue	31	6	Blue/Red
Red/Orange	32	7	Orange/Red
Red/Green	33	8	Green/Red
Red/Brown	34	9	Brown/Red
Red/Slate	35	10	Slate/Red
Black/Blue	36	11	Blue/Black
Black/Orange	37	12	Orange/Black
Black/Green	38	13	Green/Black
Black/Brown	39	14	Brown/Black
Black/Slate	40	15	Slate/Black
Yellow/Blue	41	16	Blue/Yellow
Yellow/Orange	42	17	Orange/Yellow
Yellow/Green	43	18	Green/Yellow
Yellow/Brown	44	19	Brown/Yellow
Yellow/Slate	45	20	Slate/Yellow
Violet/Blue	46	21	Blue/Violet
Violet/Orange	47	22	Orange/Violet
Violet/Green	48	23	Green/Violet
Violet/Brown	49	24	Brown/Violet
Violet/Slate	50	25	Slate/Violet

RJ21 and RJ21X connection marks are often found on the side of punch blocks and make for quick



## RJ21 wiring


Color	Pin (Tip)	Zyxel Port	Pin (Ring)	Color
 White/Blue	26	NC	1	 Blue/White
 White/Orange	27	24	2	 Orange/White
 White/Green	28	23	3	 Green/White
 White/Brown	29	22	4	 Brown/White
 White/Slate	30	21	5	 Slate/White
 Red/Blue	31	20	6	 Blue/Red
 Red/Orange	32	19	7	 Orange/Red
 Red/Green	33	18	8	 Green/Red
 Red/Brown	34	17	9	 Brown/Red
 Red/Slate	35	16	10	 Slate/Red
 Black/Blue	36	15	11	 Blue/Black
 Black/Orange	37	14	12	 Orange/Black
 Black/Green	38	13	13	 Green/Black
 Black/Brown	39	12	14	 Brown/Black
 Black/Slate	40	11	15	 Slate/Black
 Yellow/Blue	41	10	16	 Blue/Yellow
 Yellow/Orange	42	9	17	 Orange/Yellow
 Yellow/Green	43	8	18	 Green/Yellow
 Yellow/Brown	44	7	19	 Brown/Yellow
 Yellow/Slate	45	6	20	 Slate/Yellow
 Violet/Blue	46	5	21	 Blue/Violet
 Violet/Orange	47	4	22	 Orange/Violet
Violet/Green	48	3	23	Green/Violet
Violet/Brown	49	2	24	Brown/Violet
Violet/Slate	50	1	25	Slate/Violet

The generic 25 pair color code, which is always a good thing to have

Signal		Origin		D-subminiature DB-25	D-subminiature DE-9 (TIA-574)	Modified Modular Jack/MMJ	Modular connector 8P8C ("RJ45")			Modular connector 10P10C ("RJ50")		
Name	Abbreviation	DTE	DCE				TIA-561	Yost	Cyclades	National Instruments	Cyclades	Digi
Transmitted Data	TxD	•		2	3	2	6	3	3	8	4	5
Received Data	RxD		•	3	2	5	5	6	6	9	7	6
Data Terminal Ready	DTR	•		20	4	1	3	2	2	7	3	9
Carrier Detect	DCD		•	8	1	—	2	7	10	8	10 (alt 2)	
Data Set Ready	DSR	•		6	6	6	1	8	5	9	2 (alt 10)	
Ring Indicator	RI		•	22	9	—	—	—	—	2	10	1
Request To Send	RTS	•		4	7	—	8	1	1	4	2	3
Clear To Send	CTS		•	5	8	—	7	8	5	3	6	8
Common Ground	G	common		7	5	3,4	4	4,5	4	6	5	7
Protective Ground	PG	common		1	—	—	—	—	—	—	1	4

RS-232 is still common but not for data transfer in broadcast facilities; RS-485 is also used, however.

#### Null modem cables and diagrams

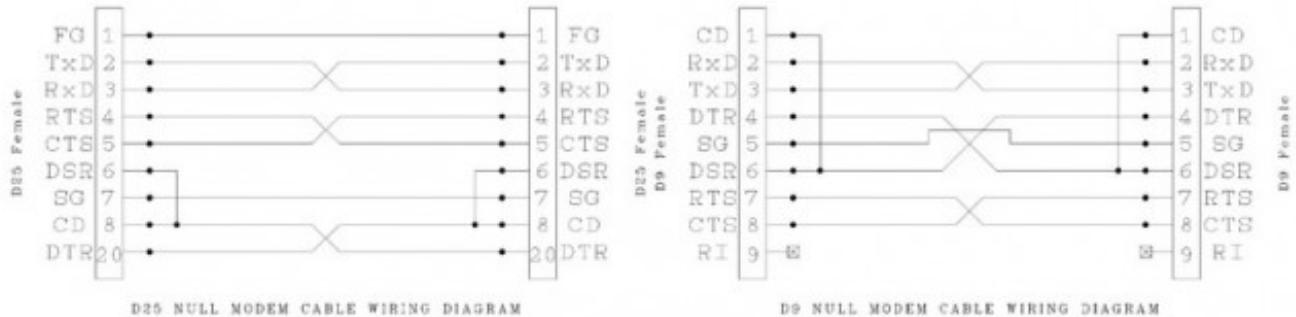


DB-25 NULL MODEM CABLE WIRING DIAGRAM

DE-9 NULL MODEM CABLE WIRING DIAGRAM

Signal Name and Abbreviation	DB-25 Pin	DE-9 Pin	Direction	DE-9 Pin	DB-25 Pin	Signal Name Abbreviation	
Frame Ground (chassis)	FG	1	—	—	1	FG	
Transmitted Data (TD)	TxD	2	3	→	2	3	RxD
Received Data (RD)	RxD	3	2	←	3	2	TxD
RS-232 Request to Send	RTS	4	7	→	8	5	CTS
RS-232 Clear To Send	CTS	5	8	←	7	4	RTS
Signal Ground	SG	7	5	—	5	7	SG
Data Set Ready	DSR	6	6	←	4	20	DTR
Data Carrier Detect (CD)	DCD	8	1	—	1	8	DCD
Data Terminal Ready	DTR	20	4	→	6	6	DSR


Null modems for connecting equipment together and testing.

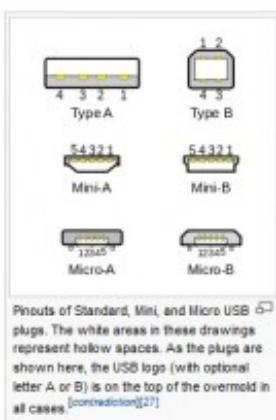


Pin	Name	Cable color	Description
1	VBUS	Red (Orange*)	+5 V
2	D-	White (Gold*)	Data -
3	D+	Green	Data +
4	GND	Black (Blue*)	Ground

\* Some manufacturers use

Pin	Name	Cable color	Description
1	VBUS	Red	+5 V
2	D-	White	Data -
3	D+	Green	Data +
4	ID	None	Permits distinction of host connection from slave connection * host: connected to Signal ground * slave: not connected
5	GND	Black	Signal ground

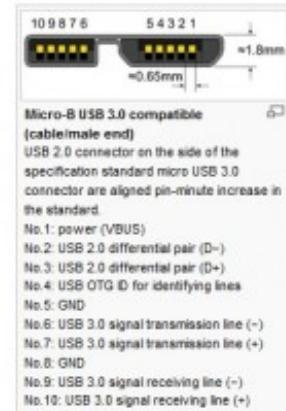

Various USB connectors and pinouts. USB has replaced RS-232 data ports on most newer computers.

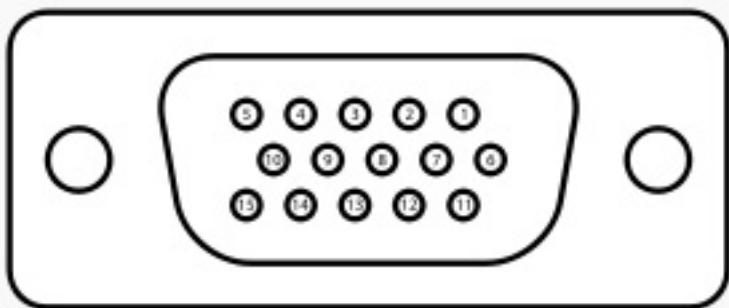


A female DE15 socket (videocard side).


<b>Pin 1</b>	RED	Red video
<b>Pin 2</b>	GREEN	Green video
<b>Pin 3</b>	BLUE	Blue video
<b>Pin 4</b>	ID2/RES	formerly Monitor ID bit 2, reserved since E-DDC
<b>Pin 5</b>	GND	Ground (HSync)
<b>Pin 6</b>	RED_RTN	Red return
<b>Pin 7</b>	GREEN_RTN	Green return
<b>Pin 8</b>	BLUE_RTN	Blue return
<b>Pin 9</b>	KEY/PWR	formerly key, now +5V DC
<b>Pin 10</b>	GND	Ground (VSync, DDC)
<b>Pin 11</b>	ID0/RES	formerly Monitor ID bit 0, reserved since E-DDC
<b>Pin 12</b>	ID1/SDA	formerly Monitor ID bit 1, <b>I<sub>C</sub></b> data since DDC2
<b>Pin 13</b>	HSync	Horizontal sync
<b>Pin 14</b>	VSync	Vertical sync
<b>Pin 15</b>	ID3/SCL	formerly Monitor ID bit 3, <b>I<sub>C</sub></b> clock since DDC2

Computer graphics card pinouts.

Pin No (DB25)	Pin No (36 pin)	Signal name	Direction	Register - bit	Inverted
1	1	Strobe	In/Out	Control-0	Yes
2	2	Data0	Out	Data-0	No
3	3	Data1	Out	Data-1	No
4	4	Data2	Out	Data-2	No
5	5	Data3	Out	Data-3	No
6	6	Data4	Out	Data-4	No
7	7	Data5	Out	Data-5	No
8	8	Data6	Out	Data-6	No
9	9	Data7	Out	Data-7	No
10	10	Ack	In	Status-6	No
11	11	Busy	In	Status-7	Yes
12	12	Paper-Out	In	Status-5	No
13	13	Select	In	Status-4	No
14	14	Linefeed	In/Out	Control-1	Yes
15	32	Error	In	Status-3	No
16	31	Reset	In/Out	Control-2	No
17	36	Select-Printer	In/Out	Control-3	Yes
18-25	19-30,33,17,16	Ground	-	-	-

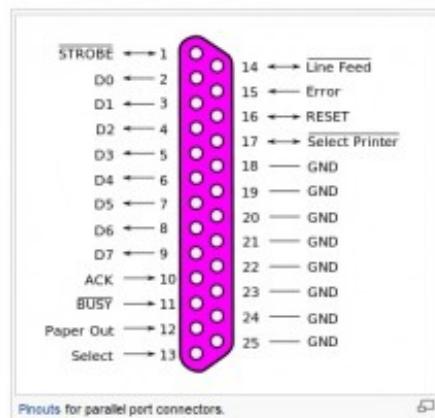

Computer parallel port (DB25) pins 18, 19, 20, 21, 22, 23, 24, and 25 are unused, and 17 is for output programming, machine

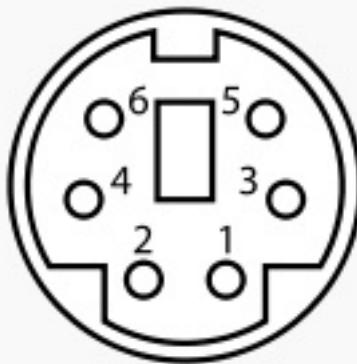


Female connector from the front

Pin 1	+DATA	Data
Pin 2	Not connected	Not connected*
Pin 3	GND	Ground
Pin 4	Vcc	+5 V DC at 275 mA
Pin 5	+CLK	Clock
Pin 6	Not connected	Not connected**

\* On some computers mouse data for splitter cable.

\*\* On some computers mouse clock for splitter cable.

PS2 mouse and keyboard connectors, again, replaced by USB but still found on older motherboards. Skipping the 6V and neutral share leave (19/20) type connectors are officially unlabelled and get it right.

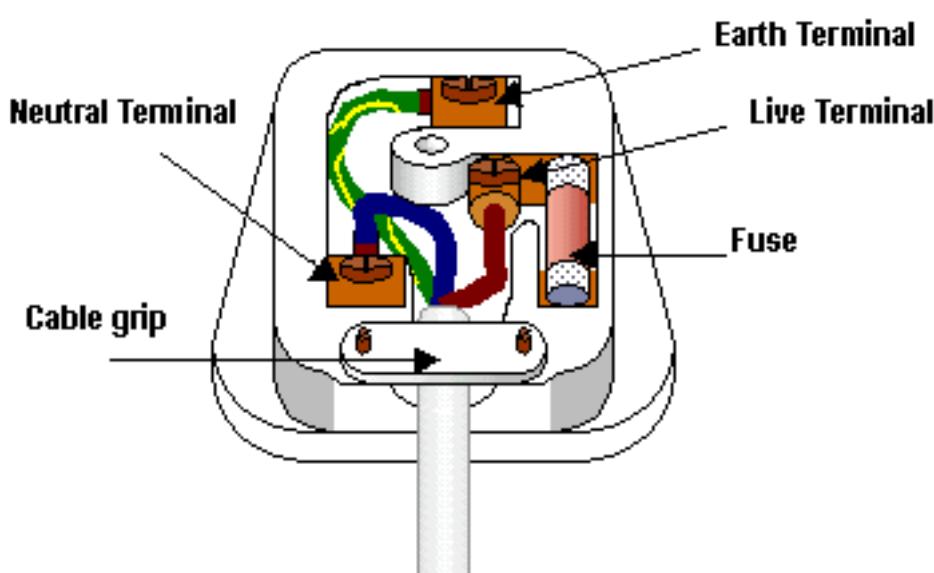

Online URL: <https://kb2.ic.uk/article.php?id=20>