

Contacts / Central User Phone Book

281 Mark Simcoe Fri, Feb 12, 2021 [Feature guides](#), [Site / Company Features](#) 1747

Contacts / Central User Phone Book

Physical Handset Phone Books

Most physical handsets are capable of storing your contacts BUT these will be local to that 1 handset only and if you reset or change the handset you will lose them. For a more central approach and to have your contacts across all handsets and apps you have please see below.

Personal Contacts

Description

The Personal Contact Directory Feature provides the ability to create custom contact directories for use by an individual Employee / User. These directories will then be available from the Directories option across hard and soft phone devices.

Function

Administrators and End Users can use this feature to create a custom Personal Contact Directory that contains numbers frequently called by the End User, such as individual clients, suppliers etc.

You can also quickly add numbers to this list by importing a phone list and loading the numbers from a CSV file. Hover over the information (i) icon for the file format.

A directory can contain a maximum of 500 contacts.

If a user has the Company Contacts feature all the contacts are added into a single directory.

For SIPT users, contacts can be created, but won't be sync'd to the PBX phone. Contacts can however be used in UC apps.

First Time Use / Enablement

If this feature has not been enabled on this user previously you will need to also enable phone services. Please make sure to see that section lower down.

Configuration/Operation

The Personal Contacts Feature is available to configure in the Business Portal under:

- Employees > Features > Contacts > Personal Contacts

Employee Selection

Features

Employee: 0324.demo

List Grid Filter

- > Mobility
- > Call Control
- ▼ Contacts
 - Personal Contacts Configure
 - Phone Services Configure

Profile

Service Settings

Features

- Click Configure

Employee Features / Personal Contacts

Personal Contacts

Import Custom File (.csv) Browse... Import

Import Format Requirements

+ Add Filter

<input type="checkbox"/>	Name	Phone Number
<input type="checkbox"/>	Chris Smith ✎	01234567890

Delete

Cancel

- To Import a list of contacts in .CSV format browse to the file and click 'Import'
- To Manually add an entry click '+Add'
- To Edit an existing entry click on the entries 'Name'
- To delete an entry select the entry via the right hand tick box and click 'x Delete'
- To delete all entries select the tick box on the right hand side of the header bar and then click 'x Delete'

<input checked="" type="checkbox"/>	Name	Phone Number
<input checked="" type="checkbox"/>	Chris Smith 	01234567890

- Click 'Add' to add an entry


Add New Contact x

*** Name**

*** Phone Number**

- Click Save

Phones normally update the phone books on reboot / reload of the configuration like;

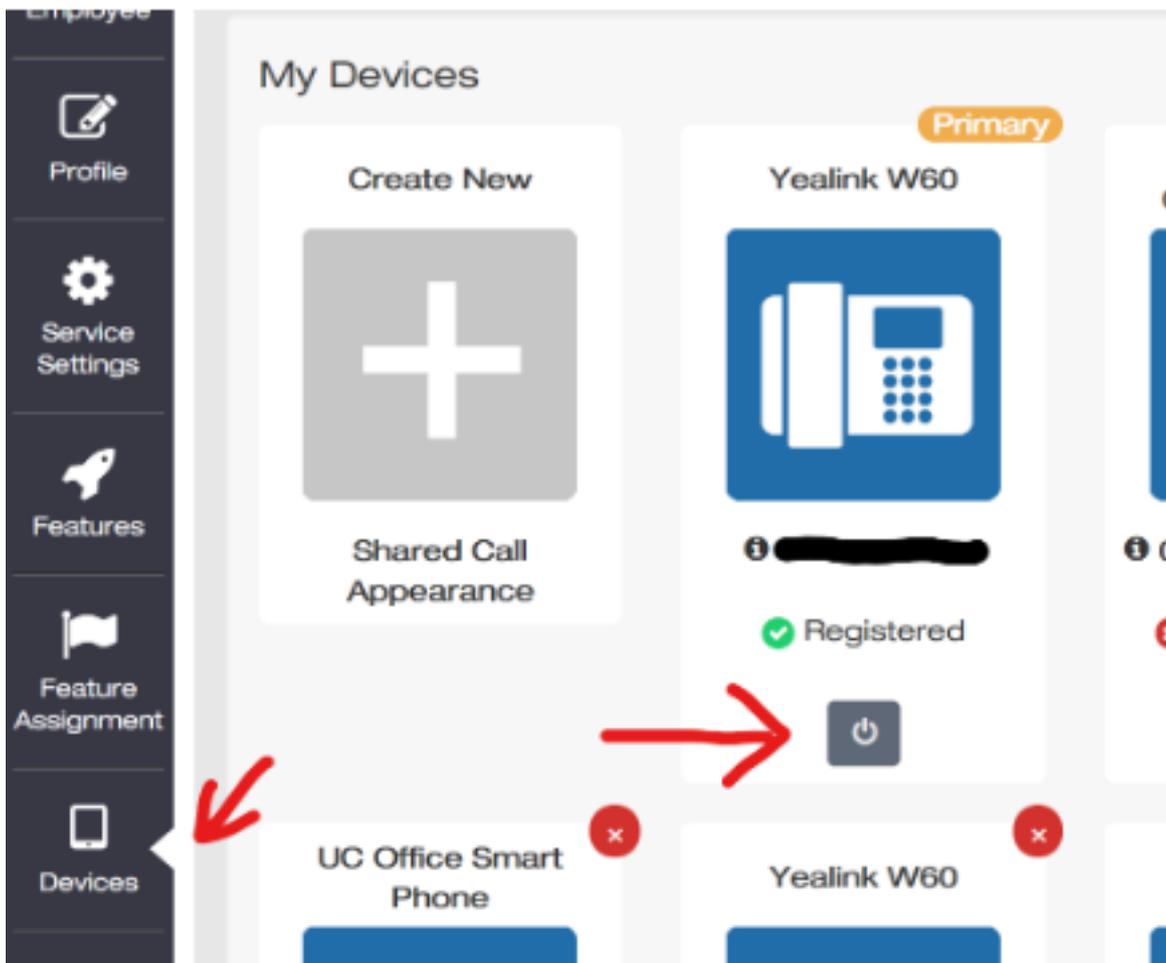

Locate your device you want to reload by clicking devices in the menu and then the power icon under the device you want to load in the new configuration / phone books to.

Limiting Conditions

The Business Portal supports the use of Alpha Numeric Characters A to Z, both upper and lower case, and 0 to 9. Special Characters Hyphen (-) and Apostrophe (') are also supported. All other Special Characters are not supported in the Business Portal and any entry containing these characters will be rejected.

The following numbers are barred from the upload:

- 118xxx
- 999

Note: - We would advise against the use of Apostrophe in Personal Contacts as some handsets may not support this character. This may lead to issues when trying to access the contacts from the handset.

Phone Services

Description

This feature provides a method of pushing down personal and company contacts (in Personal and/or Company Directories) to a User's devices.

Function

Administrators and End Users can use this feature to select which Company Contact Directory and/or the Personal Contact Directory is integrated with the User's devices.

If Phone Services are enabled for a device, but the Phone Directory is turned 'off' then neither the Site Level Phone Services nor User level configuration will apply. This means that no directories will be integrated with the device(s) that the User has.

Configuration/Operation

The User Level Phone Services feature is available to configure in the Business Portal. Navigate to:

- Employees > Features > Contacts > Phone Services

- The first page lists all the devices for which the user is able to use Phone Services with. The list only includes device profiles with a device type supporting Phone Services.

 1000317590331.sales | 442036510331@demo.sales | 0080F0D44CB3 |

 At the bottom of the table, there is a large green button with a checkmark and the text 'Save'."/>

- Enabling and then Clicking on a Device Name allows you to go to the corresponding Phone Services configuration page for the device

Edit Device

Device Details

Device Name 1000317590331.sales

Line/Port 442036510331@demo.sales

Phone Directory

Status On Off

Include Personal Contacts

Include The Following Company Contacts

None

Company Master List

- Status
- Enable/Disable Phone Directory for the Device.
- Include Personal Contacts
- Include the following Company Contacts
- Select the list of Company Contacts
- Click Save

Please note:

- In Site Phone Services, when you select apply Company Directory, when you then enable Phone Services at a User level, you must not tick company directory again, or it will duplicate
- When you make a change to the Group or Company Directory, you must disable phone services before updating

Online URL: <https://kb2.ic.uk/article.php?id=281>