

Contacts / Central User Phone Book

281 Mark Simcoe Fri, Feb 12, 2021 [Feature guides](#), [Site / Company Features](#) 1572

Contacts / Central User Phone Book

Physical Handset Phone Books

Most physical handsets are capable of storing your contacts BUT these will be local to that 1 handset only and if you reset or change the handset you will lose them. For a more central approach and to have your contacts across all handsets and apps you have please see below.

Personal Contacts

Description

The Personal Contact Directory Feature provides the ability to create custom contact directories for use by an individual Employee / User. These directories will then be available from the Directories option across hard and soft phone devices.

Function

Administrators and End Users can use this feature to create a custom Personal Contact Directory that contains numbers frequently called by the End User, such as individual clients, suppliers etc.

You can also quickly add numbers to this list by importing a phone list and loading the numbers from a CSV file. Hover over the information (i) icon for the file format.

A directory can contain a maximum of 500 contacts.

If a user has the Company Contacts feature all the contacts are added into a single directory.

For SIPT users, contacts can be created, but won't be sync'd to the PBX phone. Contacts can however be used in UC apps.

First Time Use / Enablement

If this feature has not been enabled on this user previously you will need to also enable phone services. Please make sure to see that section lower down.

Configuration/Operation

The Personal Contacts Feature is available to configure in the Business Portal under:

- Employees > Features > Contacts > Personal Contacts

Employee Selection

Employee: 0324.demo

Add Employee

Profile

Service Settings

Features

List Grid Filter

› Mobility

› Call Control

▼ Contacts

Personal Contacts Configure

Phone Services Configure

The screenshot shows the 'Features' page with a sidebar on the left containing icons for Employee Selection, Add Employee, Profile, Service Settings, and Features. The 'Features' icon is selected. The main content area is titled 'Features' and shows sections for Mobility, Call Control, and Contacts. The 'Contacts' section is expanded, showing 'Personal Contacts' and 'Phone Services' with 'Configure' buttons. The 'Personal Contacts' section is highlighted with a red box.

- Click Configure

Employee Features / Personal Contacts

Personal Contacts

Import Custom File (.csv) Browse...

Import Format Requirements

+ Add Filter

	Name	Phone Number
<input type="checkbox"/>	Chris Smith <input type="button" value="Edit"/>	01234567890

The screenshot shows the 'Personal Contacts' sub-page. It has a header with 'Employee Features / Personal Contacts' and a title 'Personal Contacts'. It includes a file import section with a 'Browse...' button and an 'Import' button. Below it is a link 'Import Format Requirements'. A green 'Add' button is on the left. A 'Filter' button is on the right. A table lists a single contact: 'Chris Smith' with a 'Edit' button, and the phone number '01234567890'. At the bottom are 'Delete' and 'Cancel' buttons.

- To Import a list of contacts in .CSV format browse to the file and click 'Import'
- To Manually add an entry click '+Add'
- To Edit an existing entry click on the entries 'Name'
- To delete an entry select the entry via the right hand tick box and click 'x Delete'
- To delete all entries select the tick box on the right hand side of the header bar and then click 'x Delete'

	Name	Phone Number
<input checked="" type="checkbox"/>	Chris Smith 	01234567890
 Delete		


- Click 'Add' to add an entry

Add New Contact X

* Name	Joe Bloggs
* Phone Number	02056511234
<input style="background-color: orange; color: white; width: 150px; height: 30px; border: none; margin-right: 20px;" type="button" value="Cancel"/> <input style="background-color: green; color: white; width: 150px; height: 30px; border: none;" type="button" value="Save"/>	

- Click Save

Phones normally update the phone books on reboot / reload of the configuration like;

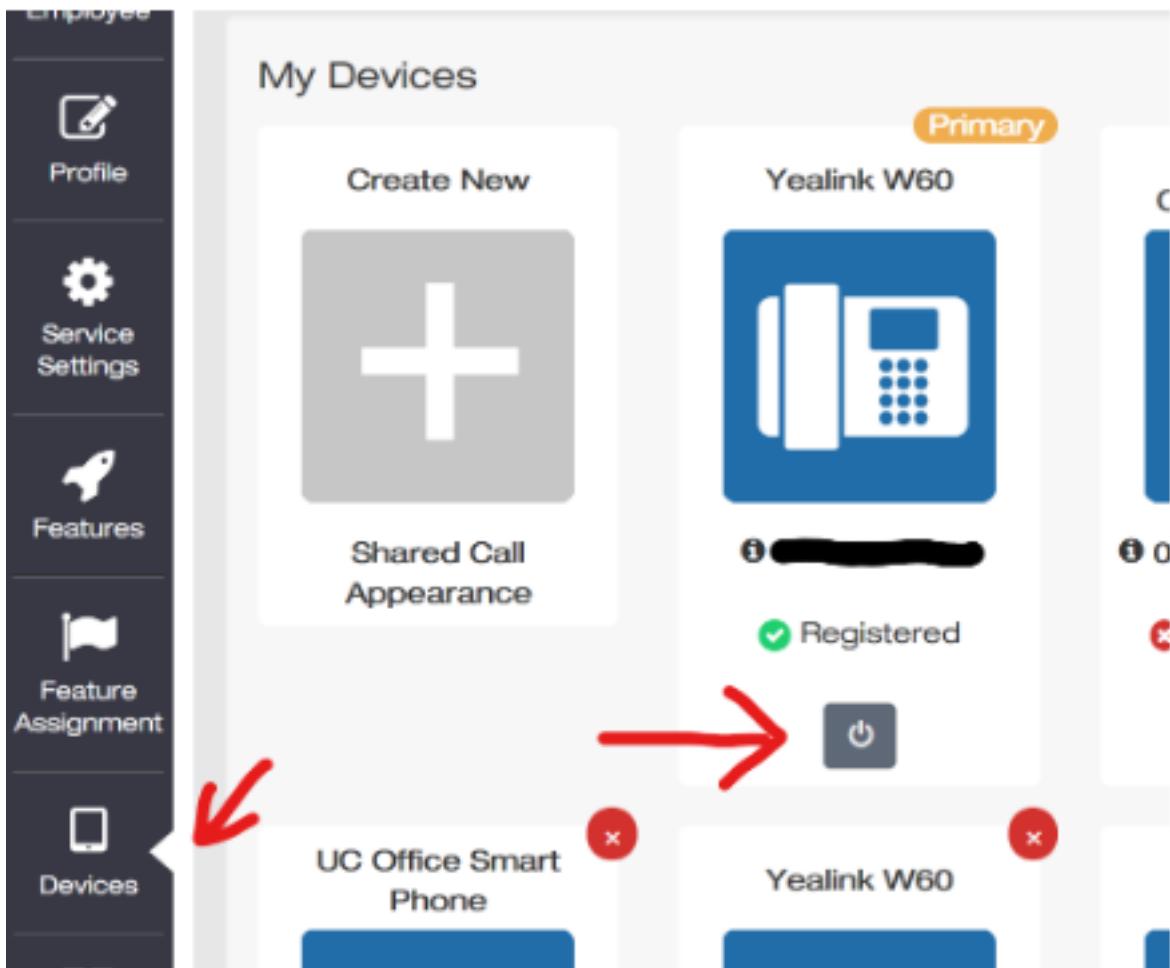

Locate your device you want to reload by clicking devices in the menu and then the power icon under the device you want to load in the new configuration / phone books to.

Limiting Conditions

The Business Portal supports the use of Alpha Numeric Characters A to Z, both upper and lower case, and 0 to 9. Special Characters Hyphen (-) and Apostrophe (') are also supported. All other Special Characters are not supported in the Business Portal and any entry containing these characters will be rejected.

The following numbers are barred from the upload:

- 118xxx
- 999

Note: - We would advise against the use of Apostrophe in Personal Contacts as some handsets may not support this character. This may lead to issues when trying to access the contacts from the handset.

Phone Services

Description

This feature provides a method of pushing down personal and company contacts (in Personal and/or Company Directories) to a User's devices.

Function

Administrators and End Users can use this feature to select which Company Contact Directory and/or the Personal Contact Directory is integrated with the User's devices.

If Phone Services are enabled for a device, but the Phone Directory is turned 'off' then neither the Site Level Phone Services nor User level configuration will apply. This means that no directories will be integrated with the device(s) that the User has.

Configuration/Operation

The User Level Phone Services feature is available to configure in the Business Portal. Navigate to:

- Employees > Features > Contacts > Phone Services

The screenshot shows the 'Features' page with the 'Employee Selection' sidebar. The 'Phone Services' section is highlighted with a red box. The list includes 'Personal Contacts', 'Phone Services', 'Speed Dial 100', and 'Speed Dial 8', each with a 'Configure' button.

Category	Item	Action
Phone Services	Personal Contacts	Configure
	Phone Services	Configure
	Speed Dial 100	Configure
	Speed Dial 8	Configure

- The first page lists all the devices for which the user is able to use Phone Services with. The list only includes device profiles with a device type supporting Phone Services.

The screenshot shows the 'Phone Services' configuration page. It displays a table with one device row and a green 'Save' button at the bottom.

Enabled	Device Name	Line/Port	MAC Address
<input checked="" type="checkbox"/>	1000317590331.sales	442036510331@demo.sales	0080F0D44CB3

Save

- Enabling and then Clicking on a Device Name allows you to go to the corresponding Phone Services configuration page for the device

Edit Device X

Device Details

Device Name	1000317590331.sales
Line/Port	442036510331@demo.sales

Phone Directory

Status	<input checked="" type="radio"/> On <input type="radio"/> Off
<input checked="" type="checkbox"/> Include Personal Contacts	
<input checked="" type="checkbox"/> Include The Following Company Contacts	
<div style="border: 1px solid #ccc; padding: 5px; background-color: #f9f9f9;"> None Company Master List </div>	

- Status
- Enable/Disable Phone Directory for the Device.
- Include Personal Contacts
- Include the following Company Contacts
- Select the list of Company Contacts
- Click Save

Please note:

- In Site Phone Services, when you select apply Company Directory, when you then enable Phone Services at a User level, you must not tick company directory again, or it will duplicate
- When you make a change to the Group or Company Directory, you must disable phone services before updating

Online URL: <https://kb2.ic.uk/article.php?id=281>